



**EXPANSION JOINT DETAIL FOR PAVEMENT SECTIONS WITH  
 $\leq$  RADII TO 500' & DELTAS ( $\Delta$ ) GREATER THAN 50°**

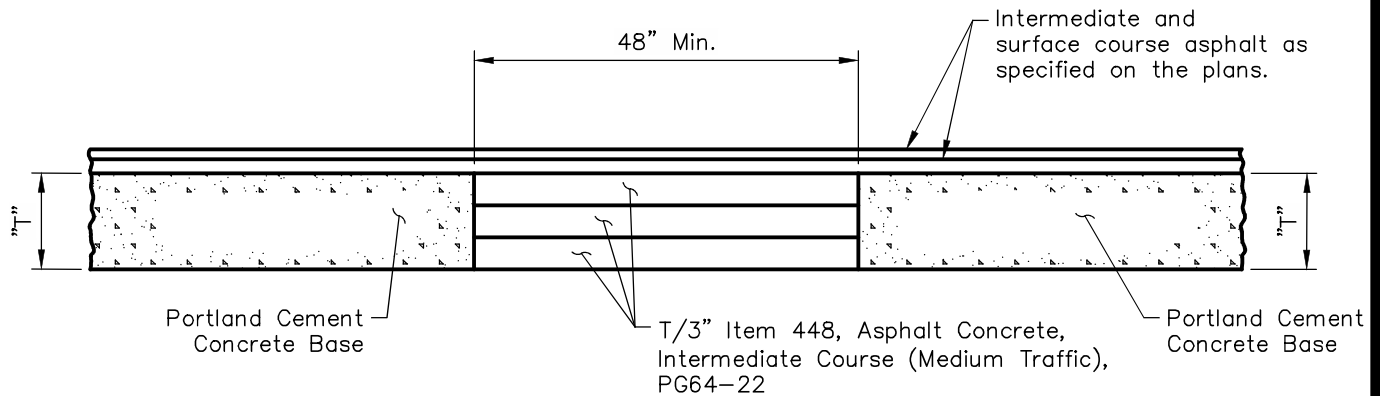



**SECTION A-A FOR CONCRETE BASE PAVEMENT**

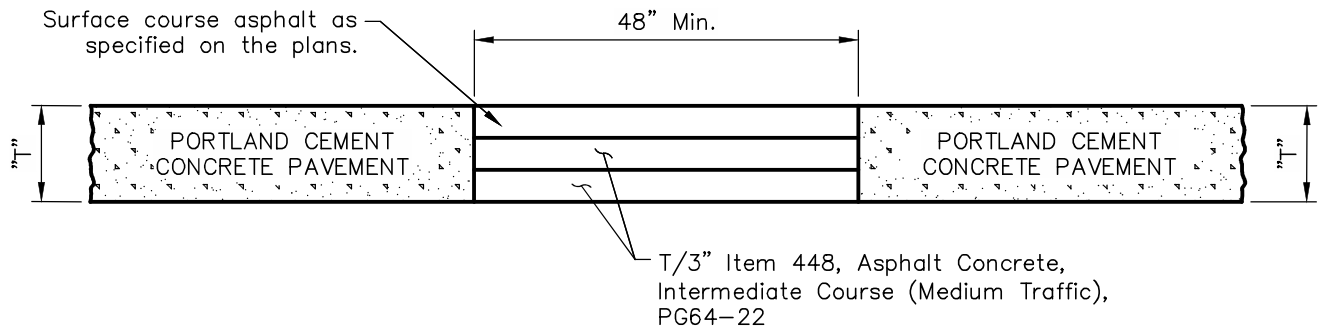

**SECTION A-A FOR CONCRETE PAVEMENT**

**NOTES:**

1. 2" expansion material shall be placed at the P.C. and P.T. in the concrete curb.
2. Maximum spacing of 500' between joints on straight sections of pavement without curves.

<div>Approved By:</div> <div></div> <div>City Engineer, EMH&amp;T Inc</div> <div></div> <div>City Service Director</div>	<div>STANDARD DIMENSIONS FOR</div> <div>EXPANSION JOINT DETAIL AT CURVE POINTS</div>	<div>CITY OF GROVE CITY, OHIO</div>		
		<div>STANDARD CONSTRUCTION DRAWING</div>		
		<div>Revised</div> <div>October 2015</div>		<div>Drawing No.</div> <div>C-GC-59</div>